



RhinoFLOR®  
Chipboard Core Panel




## F 25F/28F

Full Encapsulated Panel

RhinoFLOR® Full-encapsulated panels are manufactured from chipboard core (approx. 680 kg/m<sup>3</sup>) non-toxic and light weight material. The design incorporates a unique wrap around construction which makes panel removal and replacement easily. This design provides more strength on edges.

**RHINO**®  
Strive for perfection!

**Panel**

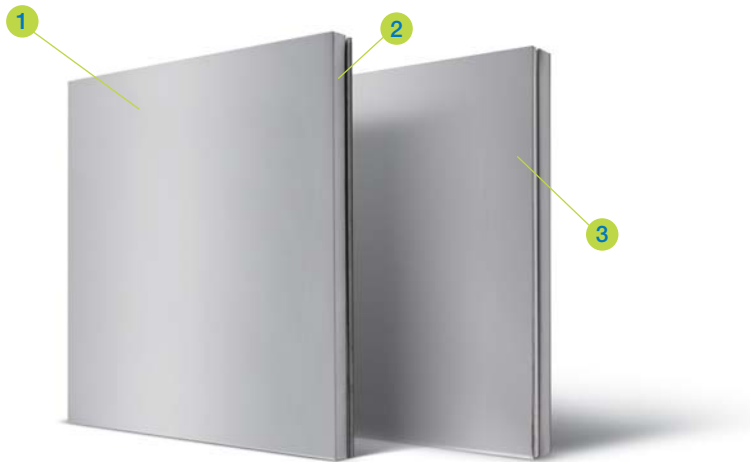


- 1 Top Layer**  
Thickness: 0.3 / 0.4 / 0.5 mm  
Material: Galvanized steel sheet
- 2 Edge**  
Construction: Unique wrapped around construction
- 3 Under Layer**  
Thickness: 0.3 / 0.4 / 0.5 mm  
Material: Galvanized steel sheet

**Description**

RhinoFLOR® Full-encapsulated panels are manufactured from chipboard core (approx. 680 kg/m<sup>3</sup>) non-toxic and light weight material. The design incorporates a unique wrap around construction which makes panel removal and replacement easily. This design provides more strength on edges.


**Features**

- Non-toxic
- Non-combustible
- Impressive acoustic performance
- Superb underfoot comfort
- High load capacity
- Low air leakage rate

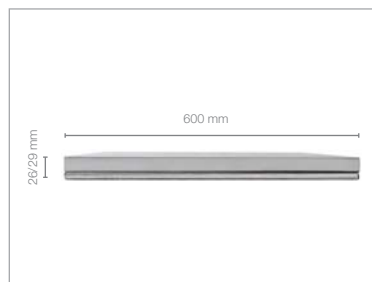

Panel Type	Panel Size	Core Material	Panel Construction	Panel Thickness (Nominal)	System Weight (Typical)
F 25F	600 mm square	Chipboard	Galvanized steel full-encapsulated	26.00 mm	23.00 Kg/m <sup>3</sup>
F 28F	600 mm square	Chipboard	Galvanized steel full-encapsulated	29.00 mm	25.00 Kg/m <sup>3</sup>

System

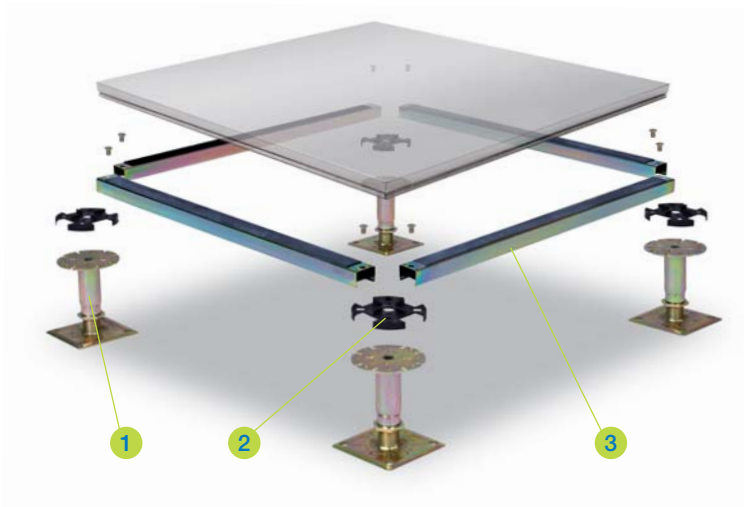

**1 Standard Pedestal**

Electro-galvanized steel made pedestal is suitable for raised floors with a finished floor height from 100mm to 1800mm. Zinc whisker free is available for special order.  
Material: Steel, Yellow Galvanized.


**2 Head Gasket**

Plastic conductive material with sound proofing and sealing functions, equipped with tabs for the positioning of panels.  
Thickness: 2.0mm

**3 Stringer**

Steel tube performed stringer with plastic gasket on top provide best supports to the structural system with limited air leakage and outstanding acoustic performance.  
Dimension: 537mm x 30mm x 20mm  
Thickness: 0.8/1.0/1.2mm

Pedestal

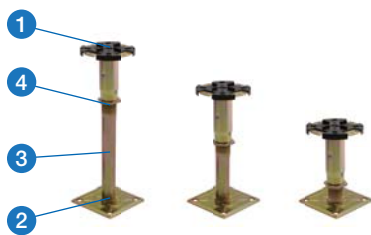

**1 Head Assembly**

Head plate: Ø90mm x 3.0mm  
Head tube: Ø32mm x 2.0mm

**2 Base Assembly**

Base tube: Ø25mm x 2.5mm  
Base Plate: 100mm x 100mm x 2.5mm

**3 FFH (Finished Floor Height)**

100mm to 1800mm

**4 Adjusting Range**

+/- 30mm

Performance

- This rigid grid system is tested in accordance with PSA MOB PS/SPU specification.
- Panel deflection at centre edge must not exceed 2.5mm
- Performance to a safety factor of 3 x static load
- Structural performance based upon a full Rhino access floors system i.e. panels & pedestals.



Panel Type	Panel Grade	Concentrated Load		Uniformly Distribution Load	Ultimate Load
		Point Load	Load Over		
		25mm x 25mm square	300mm x 300mm square		
F 25F	Medium Duty	3.00 kN	4.50 kN	8.00 kN/m <sup>2</sup>	9.00 kN
F 28F	Heavy Duty	4.50 kN	5.56 kN	12.00 kN/m <sup>2</sup>	13.50 kN

# **RHINO**<sup>®</sup>

*Strive for perfection!*

#### **Corporate Headquarters**

111 S.K.V. Building, 4<sup>th</sup> Floor  
Soi Sansabai, Klongton  
Klongtoey, Bangkok 10110  
Thailand

**T/** (662) 661 2990

**F/** (662) 661 2991

#### **China Office**

593, Tongjiang Road  
Jintian Plaza 828-830  
Changzhou 213022  
Jiangsu, China

**T/** (86) 519 8988 3171

**F/** (86) 519 8988 3901

#### **Hong Kong Office**

Unit 908, 9/F, LT Tower  
31 Chong Yip Street  
Kwun Tong, Kowloon  
Hong Kong

**T/** (852) 2865 6816

**F/** (852) 2865 6813

#### **Production Unit**

Hengshanqiao  
Wujin District  
Changzhou 213119  
Jiangsu, China

**T/** (86) 519 8860 7959

**F/** (86) 519 8860 5659

[www.RhinoAccessFloors.com](http://www.RhinoAccessFloors.com)