



RhinoEU®
Calcium Sulphate Panel



RSP 800EU/1000EU Airflow Panel

RhinoEU® Airflow panels are manufactured from structural steel technology makes the size and thickness same as EU panels but light weight. The top surface of the panel is laminated with anti-static HPL or conductive vinyl tiles with numbers of different airflow rates, this resistance welded all-steel panels are the premier choice for computer rooms and data centers.


RHINO®
Strive for perfection!

Product Ranges

RhinoEU® Airflow



Panel

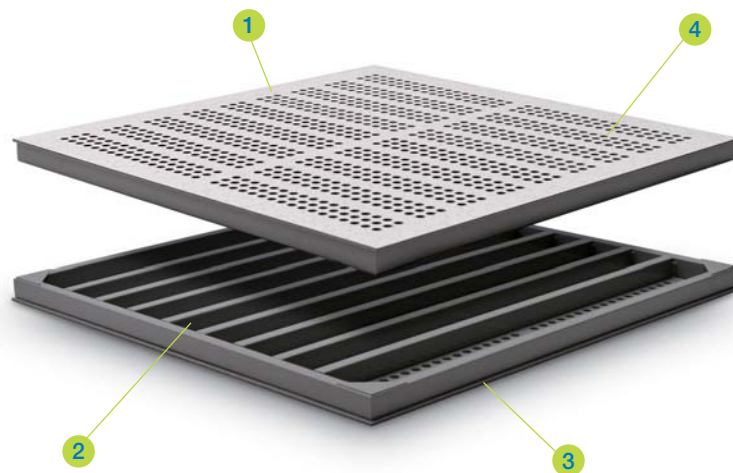


- 1 Airflow Rates**
Rates: 15%, 20%, 25%, 30%, 35%, 45%, 50%, 65%
- 2 Bottom Structure**
Thickness: 2.0mm
Material: Steel rectangular tube welded
- 3 Top Layer**
Thickness: 2.0/2.5 mm
Material: Cold rolled steel sheet
- 4 Finish**
Thickness: Various
Material: Bare, Anti-static HPL, Conductive Vinyl

Description

RhinoEU® Airflow panels are manufactured from structural steel technology makes the size and thickness same as EU panels but light weight. The top surface of the panel is laminated with anti-static HPL or conductive vinyl tiles with numbers of different airflow rates, this resistance welded all-steel panels are the premier choice for computer rooms and data centers.

Features

- All-steel structural design
- 90% recyclable
- Light weight easy install and removal
- Powder-coated, protective epoxy finish
- Fully interchangeable with other EU panels

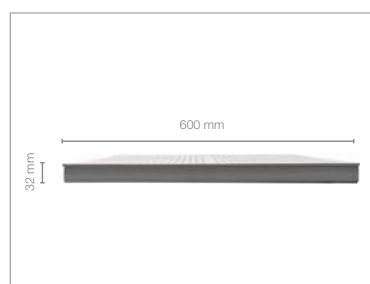


Panel Type	Panel Size	Top Steel Sheet	Panel Construction	Panel Thickness (Nominal)	System Weight (Typical)
RSP 800EU	600 mm square	2.00 mm	Cold rolled steel welded	32.00 mm	31.00 kg/m ²
RSP 1000EU	600 mm square	2.50 mm	Cold rolled steel welded	32.00 mm	34.00 kg/m ²

Product Ranges

RhinoEU® Airflow

System

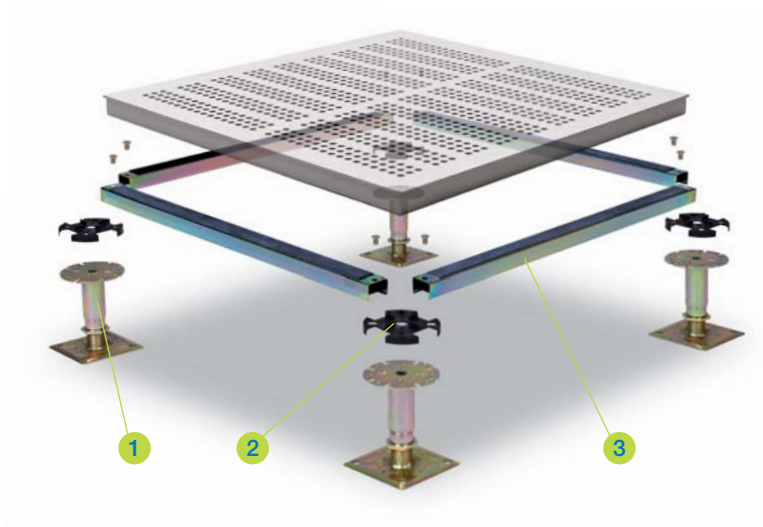

1 Standard Pedestal

Electro-galvanized steel made pedestal is suitable for raised floors with a finished floor height from 100mm to 1800mm. Zinc whisker free is available for special order.
Material: Steel, Yellow Galvanized.


2 Head Gasket

Plastic conductive material with sound proofing and sealing functions, equipped with tabs for the positioning of panels.
Thickness: 2.0mm

3 Stringer

Steel tube performed stringer with plastic gasket on top provide best supports to the structural system with limited air leakage and outstanding acoustic performance.
Dimension: 537mm x 30mm x 20mm
Thickness: 0.8/1.0/1.2mm

Pedestal

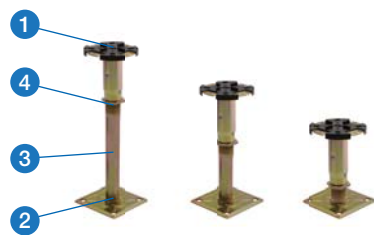

1 Head Assembly

Head plate: Ø90mm x 3.0mm
Head tube: Ø32mm x 2.0mm

2 Base Assembly

Base tube: Ø25mm x 2.5mm
Base Plate: 100mm x 100mm x 2.5mm

3 FFH (Finished Floor Height)


100mm to 1800mm

4 Adjusting Range

+/- 30mm

Performance

- This rigid grid system is tested in accordance with PSA MOB PS/SPU specification.
- Panel deflection at centre edge must not exceed 2.5mm
- Performance to a safety factor of 3 x static load
- Structural performance based upon a full Rhino access floors system i.e. panels & pedestals.

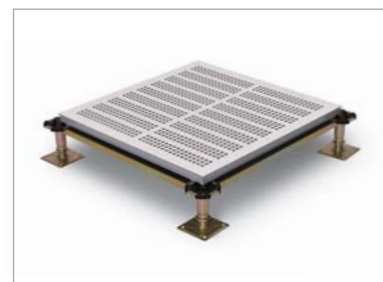

Panel Type	Panel Grade	Concentrated Load		Uniformly Distribution Load	Ultimate Load
		Point Load	Load Over		
		25mm x 25mm square	300mm x 300mm square		
RSP 800EU	Medium Duty	3.00 kN	4.50 kN	8.00 kN/m²	9.00 kN
RSP 1000EU	Heavy Duty	4.50 kN	5.56 kN	12.00 kN/m²	13.50 kN

**Corporate Headquarters**

111 S.K.V. Building, 4th Floor
Soi Sansabai, Klongton
Klongtoey, Bangkok 10110
Thailand

T/ (662) 661 2990

F/ (662) 661 2991

China Office

593, Tongjiang Road
Jintian Plaza 828-830
Changzhou 213022
Jiangsu, China

T/ (86) 519 8988 3171

F/ (86) 519 8988 3901

Hong Kong Office

Unit 908, 9/F, LT Tower
31 Chong Yip Street
Kwun Tong, Kowloon
Hong Kong

T/ (852) 2865 6816

F/ (852) 2865 6813

Production Unit

Hengshanqiao
Wujin District
Changzhou 213119
Jiangsu, China

T/ (86) 519 8860 7959

F/ (86) 519 8860 5659

www.RhinoAccessFloors.com