


The seismic pedestal type SSP501 from galvanized steel in combination with gaskets and optionally stringer type RSL600 is used as substructure with raised access floor systems. The system floor pedestals are entirely made by Rhino, from the design to the production including galvanization.

The seismic pedestal type SSP501 creates the cavity for taking up installations. The seismic pedestal type SSP501 offers exceptional flexibility by its high loadability and the high adjustment range. The pedestals are infinitely adjustable on height and can therefore take up irregularities of the subfloor.

Features

- Unique flexibility
- High loadability
- Easy installation
- High corrosion protection
- Zinc-whisker free
- Can be combined with stringer type RSL600, RSL1200

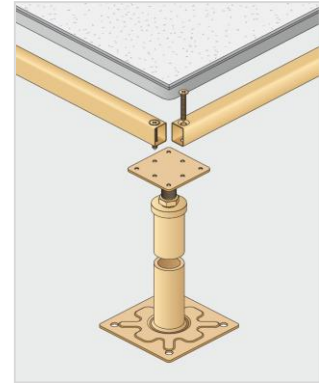

TECHNICAL DETAILS

Upper pedestal part	
Head plate	76 x 76 mm
Thickness	4.0 mm
Threaded bolt	M20 screw down
Lower pedestal part	
Foot plate	120 x 120 mm
Thickness	4.0 mm
Tube (FFH 1200 - 1800 mm)	Ø 38 x 2.0 mm

STATIC

Ultimate load centric	≥ 35 kN
-----------------------	---------

CORROSION PROTECTION

Corrosion protection class	Galvanized & blue passivated
Salt spray fog test	72 hours

PEDESTAL VARIANTS

FFH	Part number	Adjustment range
1200 mm	SSP501-M20-1200	1160 - 1240 mm
1250 mm	SSP501-M20-1250	1210 - 1290 mm
1300 mm	SSP501-M20-1300	1260 - 1340 mm
1350 mm	SSP501-M20-1350	1310 - 1390 mm
1400 mm	SSP501-M20-1400	1360 - 1440 mm
1450 mm	SSP501-M20-1450	1410 - 1490 mm
1500 mm	SSP501-M20-1500	1450 - 1550 mm
1550 mm	SSP501-M20-1550	1500 - 1600 mm
1600 mm	SSP501-M20-1600	1550 - 1650 mm
1700 mm	SSP501-M20-1700	1650 - 1750 mm
1800 mm	SSP501-M20-1800	1750 - 1850 mm

FFH (Finished Floor Height) = floor tile + pedestal

We reserve the right to change specification or design and supply products which may differ from those described and illustrated without notice and without liability. ©2010-2025 Rhino Technologies Co., Ltd. SSP501-M20-v2025