


The system floor pedestal type M4 from galvanized steel in combination with gaskets and optionally stringers type RO, RL and RM is used as substructure with raised access floor systems. The system floor pedestals are entirely made by Rhino, from the design to the production including galvanization.

The system floor pedestal type M4 creates the cavity for taking up installations. The system floor pedestal type M4 offers exceptional flexibility by its high loadability and the high adjustment range. The pedestals are infinitely adjustable on height and can therefore take up irregularities of the subfloor.

- Unique flexibility
- High loadability
- Easy installation
- High corrosion protection
- Zinc-whisker free
- Can be combined with stringer type RO, RL and RM flexibility

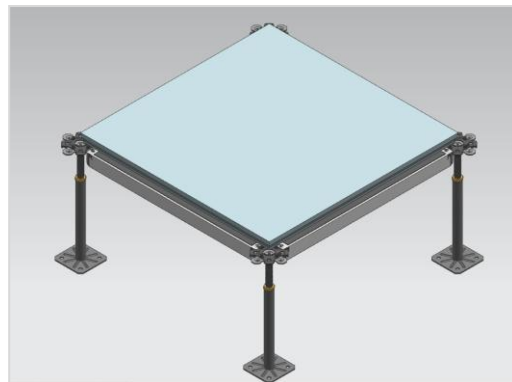

TECHNICAL DETAILS

Upper pedestal part	
Head plate	80 x 80 mm
Thickness	3.0 mm
Threaded bolt	M20
Lower pedestal part	
Foot plate	90 x 90 mm
Thickness	3.0 mm
Tube (FFH 300 - 900 mm)	Ø 24 x 2.0 mm

STATIC

Ultimate load centric	≥ 27 kN
-----------------------	---------

CORROSION PROTECTION

Corrosion protection class	Galvanized & blue passivated
Salt spray fog test	72 hours

PEDESTAL VARIANTS

FFH	Part number	Adjustment range
300 mm	M4-M20-300	275 - 325 mm
350 mm	M4-M20-350	325 - 375 mm
400 mm	M4-M20-400	375 - 425 mm
450 mm	M4-M20-450	425 - 475 mm
500 mm	M4-M20-500	475 - 525 mm
550 mm	M4-M20-550	525 - 575 mm
600 mm	M4-M20-600	575 - 625 mm
650 mm	M4-M20-650	620 - 680 mm
700 mm	M4-M20-700	670 - 730 mm
750 mm	M4-M20-750	720 - 780 mm
800 mm	M4-M20-800	770 - 830 mm
850 mm	M4-M20-850	820 - 880 mm
900 mm	M4-M20-900	870 - 930 mm

FFH (Finished Floor Height) = floor tile + pedestal

We reserve the right to change specification or design and supply products which may differ from those described and illustrated without notice and without liability. ©2010-2025 Rhino Technologies Co., Ltd. M4-M20-v2025