


The seismic pedestal type SSP401 from galvanized steel in combination with gaskets and optionally stringer type RSL600 is used as substructure with raised access floor systems. The system floor pedestals are entirely made by Rhino, from the design to the production including galvanization.

The seismic pedestal type SSP401 creates the cavity for taking up installations. The seismic pedestal type SSP401 offers exceptional flexibility by its high loadability and the high adjustment range. The pedestals are infinitely adjustable on height and can therefore take up irregularities of the subfloor.

Features

- Unique flexibility
- High loadability
- Easy installation
- High corrosion protection
- Zinc-whisker free
- Can be combined with stringer type RSL600, RSL1200

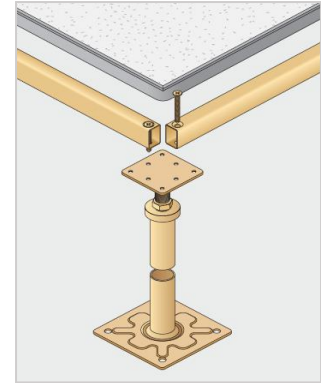

TECHNICAL DETAILS

Upper pedestal part	
Head plate	76 x 76 mm
Thickness	4.0 mm
Threaded bolt	M20 screw down
Lower pedestal part	
Foot plate	120 x 120 mm
Thickness	4.0 mm
Tube (FFH 600 - 1200 mm)	Ø 32 x 1.5 mm

STATIC

Ultimate load centric	≥ 30 kN
-----------------------	---------

CORROSION PROTECTION

Corrosion protection class	Galvanized & blue passivated
Salt spray fog test	72 hours

PEDESTAL VARIANTS

FFH	Part number	Adjustment range
600 mm	SSP401-M20-600	570 - 630 mm
650 mm	SSP401-M20-650	620 - 680 mm
700 mm	SSP401-M20-700	670 - 730 mm
750 mm	SSP401-M20-750	720 - 780 mm
800 mm	SSP401-M20-800	770 - 830 mm
850 mm	SSP401-M20-850	820 - 880 mm
900 mm	SSP401-M20-900	870 - 930 mm
950 mm	SSP401-M20-950	920 - 980 mm
1000 mm	SSP401-M20-1000	960 - 1040 mm
1100 mm	SSP401-M20-1100	1060 - 1140 mm
1200 mm	SSP401-M20-1200	1160 - 1240 mm

FFH (Finished Floor Height) = floor tile + pedestal

We reserve the right to change specification or design and supply products which may differ from those described and illustrated without notice and without liability. ©2010-2025 Rhino Technologies Co., Ltd. SSP401-M20-v2025