



Product characteristics

- Superb walking comfort
- Very high loadability
- Low system weight
- Quick installation
- Can be combined with other RhinoROC® floors
- Manufactured by Rhino according to the highest quality and environment standards
- Free choice of coverings
- Tone-to-tone color customization

System description


RhinoROC® HPL or PVC finish panel with F-mini trim has the same welded structural steel technology found in the Roc bare finish panel making the two interchangeable. The tiny straight trim with excellent squareness is the premier choice for an office building when client has a special requirement for HPL or Vinyl floor covering with various colors option.

Areas of application

- Living rooms and corridors in residential buildings
- Office areas, working areas, corridors and hospitals
- Sales rooms, retail stores and department stores
- Factories, workshops and warehouses with light use
- Restaurants, showrooms, and auditoriums

Suitability of coverings

- Resilient floor coverings
- Textile and woven floor coverings
- Rubber flooring
- HPL.

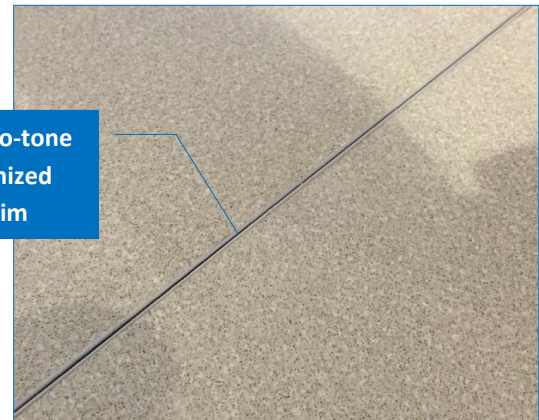

TECHNICAL DETAILS

Panel Type	Panel Size	Core Material	Panel Construction	Panel Thickness (include frame)	Panel Weight (Nominal)
ROC 100F	600 mm square	Light weight cement-filled	Cold rolled steel resistance welded	35.00 mm	14 kg
ROC 200F	600 mm square	Light weight cement-filled	Cold rolled steel resistance welded	35.00 mm	15 kg

LOAD PERFORMANCE CHART

Panel Type	Understructure	Performance Grades	Static Loads			Rolling Loads		Impact Loads
			Concentrated Load	Ultimate Load	Uniform Load	10 Passes	10,000 Passes	
ROC 100F	Bolted Stringer	Medium Duty	3.56 kN	10.68 kN	14.00 kN	2.67 kN	1.78 kN	0.67 kN
ROC 200F	Bolted Stringer	Heavy Duty	4.45 kN	13.34 kN	17.00 kN	3.56 kN	2.67 kN	0.67 kN