



FORZ Homogeneous flooring, healthy and anti-microbial, directional design, PUR PROTEC treatment

Comply with ISO14001, Using European advanced production technology, insure the raw materials and production meet European standard. It can effectively inhibit the growth of MASA. Comply with the limit testing of national harmful substances (GB18586), the product don't have any harmful substances for human.

Decòrlux

Key Features

- Excellent abrasion resistance
- Available in 2 m sheet
- Flexible flooring, easy to install & weld
- Matt finish surface: enhanced design & colour
- Homogeneous vinyl flooring suitable for medium to heavy duty traffic areas



Color number: 24



Sheet size: 200 cm x 20 lm




Thickness: 2.0 / 2.5 / 3.0

FORZ is a durable, high performing flexible homogeneous multipurpose flooring suitable for most types of heavy traffic areas. It benefits from PUR Protect surface treatment with excellent


Colorline




F6012



F6014



F6003




F6001



F6011




F6021

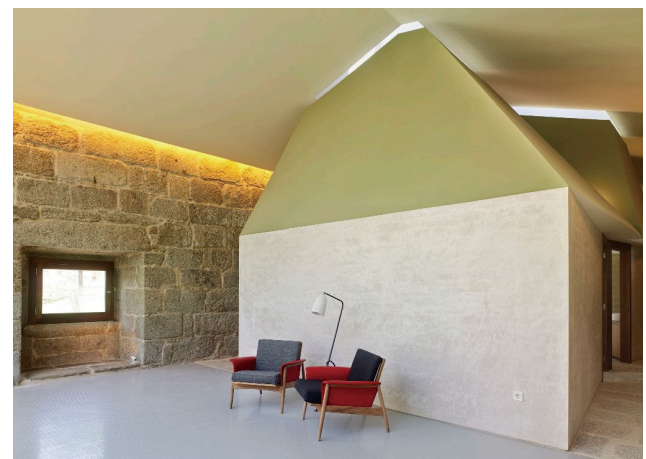



F6017



F6007



F6022



F6013



F6009



F6010



F6018



F6023



F6004



F6002



F6008



F6006



F6019



F6015



F6024



F6005



F6020



F6016



INSTALLATION

Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C.

MAINTENANCE

An emulsion dressing is required. Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floor covering should be maintained with regular sweeping and damp mopping using a neutral cleanser, more intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

PRODUCT SPECIFICATION		
Thickness	ENISO 24346	2.0 mm, 2.5 mm, 3.0 mm
Length/width	ENISO 24341	2 m x 20 m
Weight	ENISO 23997	2.0 mm; 3100 g/m ²

CLASSIFICATION			
Fire rating	GB8624-2012	Class	B-S1
Toxic Testing	GB18586-2001	-	Good
Electrical Resistance	EN 1081	Ω	>3.0*10 ¹⁰
Slip resistance dry	EN 13893	-	≥0.3
Slip resistance wet	DIN 51130	Class	R9

PRODUCT PERFORMANCE			
Dimensional Stability	EN 434-1994	%	≤0.4
Thermal Conductivity	EN 12667	W/(m.k)	0.050
Castor Wheel Test	EN 425	-	SUITABLE
Wear Resistance	EN660.2	mm ³	≤ 3.5
Abrasion Group	EN649	group	P
Residual Indentation	EN ISO 24343.1	mm	0.04
Colour Fastness	EN ISO 105-B02	degree	6
Chemical Product Resistance	EN ISO 26987	-	GOOD
Antibacterial Property	ENISO 846-C	-	No growth of bacteria
Toxic testing	GB18586-2001	-	OK
Hygiene Treatment	MRSA	-	VERY GOOD
Impact Sound Reduction	EN ISO 10140/1 EN ISO 717/2	-	APPROX+4DB
Surface Treatment	-	-	PUR



©2023/FOR6000/V01

Factory

Wuxi Decorlux Floor Co., Ltd.
2 Jishan Road, Jiangyin
Wuxi 214445
China
Info@Decorlux-Group.com
www.Decorlux-Group.com

Headquarters

593 Tongjiang Road
Century Jintian 828-830
Changzhou 213022
China
Phone +86 519 8988 3171
Fax +86 519 8988 3901

Important Note:

We reserve the right to change specification or design and supply products which may differ from those described and illustrated without notice and without liability. ©2023 Wuxi Decorlux Floor Co., Ltd.
Commercial Reg. No.: 9132028MACMDTXK27
VAT Reg. No.: 9132028MACMDTXK27